



Designation: D 427 – 98



Standard Test Method for Shrinkage Factors of Soils by the Mercury Method¹

This standard is issued under the fixed designation D 427; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reappraisal. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reappraisal.

1. Scope

1.1 This test method provides a procedure for obtaining the data which are used to calculate the shrinkage limit and the shrinkage ratio.

1.2 This test method uses mercury which is a hazardous substance. Test Method D 4943 does not use mercury and is an acceptable alternate to this procedure.

1.3 The liquid limit, plastic limit, and shrinkage limit are often collectively referred to as the Atterberg Limits in recognition of their formation by Swedish soil scientist, A. Atterberg. These water contents distinguish the boundaries of the several consistency states of cohesive soils.

1.4 This test method is performed only on that portion of a soil which passes the 425- μm (No. 40) sieve. The relative contribution of this portion of the soil must be considered when using this test method to evaluate the properties of the soil as a whole.

1.5 The values stated in SI units are to be regarded as the standard. The values stated in inch-pound units are approximate and given for guidance only. Reporting of test results in units other than SI shall not be regarded as nonconformance with this standard.

1.6 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.* This test method involves the use of the hazardous material mercury, see Section 7.

NOTE 1—**Warning:** Mercury is a definite health hazard in use and disposal.

2. Referenced Documents

2.1 ASTM Standards:

C 670 Practice for Preparing Precision and Bias Statements for Test Methods for Construction Materials²

D 421 Practice for Dry Preparation of Soil Samples for

Particle-Size Analysis and Analysis and Determination of Soil Constants³

D 653 Terminology Relating to Soil, Rock, and Contained Fluids³

D 2216 Test Method for Laboratory Determination of Water (Moisture) Content of Soil and Rock³

D 2488 Practice for Description and Identification of Soils (Visual-Manual Procedure)³

D 3740 Practice for Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction³

D 4318 Test Method for Liquid Limit, Plastic Limit, and Plasticity Index of Soils³

D 4753 Specification for Evaluating, Selecting, and Specifying Balances and Scales for Use in Testing Soil, Rock, and Related Construction Materials³

D 4943 Test Method for Shrinkage Factors of Soils by the Wax Method⁴

3. Terminology

3.1 Definitions:

3.1.1 The definitions used in this test method shall be in accordance with Terminology D 653.

3.1.2 *dry strength*—a descriptive measure of the effort required to crush an air-dried 12-mm ($\frac{1}{2}$ -in.) diameter ball of soil in accordance with Practice D 2488.

4. Summary of Test Method

4.1 A sample of fine-grained soil is thoroughly remolded with water to approximate the liquid limit consistency. The saturated paste is placed into a container of known volume and slowly dried. The final mass and volume of the solid soil pat are determined. These measurements are used to compute the soil constants.

5. Significance and Use

5.1 The shrinkage factors covered in this test method can only be determined on basically fine-grained (cohesive) soils which exhibit a dry strength when air dried.

5.2 The term shrinkage limit, expressed as a water content in percent, is typically assumed to represent the amount of

¹ This test method is under the jurisdiction of ASTM Committee D-18 on Soil and Rock and is the direct responsibility of Subcommittee D18.03 on Texture, Plasticity, and Density Characteristics of Soils.

Current edition approved Dec. 10, 1998. Published March 1999. Originally published as D 427 – 35. Last previous edition D 427 – 93 (1998).

² *Annual Book of ASTM Standards*, Vol 04.02.

³ *Annual Book of ASTM Standards*, Vol 04.08.

⁴ *Annual Book of ASTM Standards*, Vol 04.09.

water required to fill the voids of a given cohesive soil at its minimum void ratio obtained by drying (usually oven). Thus, the concept shrinkage limit can be used to evaluate the shrinkage potential or possibility of development, or both, of cracks in earthworks involving cohesive soils.

5.3 Data obtained from this test method may be used to compute the volumetric shrinkage and linear shrinkage.

NOTE 2—Notwithstanding the statements on precision and bias contained in this test method, the precision of this test method is dependent on the competence of the personnel performing it and the suitability of the equipment and facilities used. Agencies which meet the criteria of Practice D 3740 are generally considered capable of competent and objective testing. Users of this test method are cautioned that compliance with Practice D 3740 does not in itself ensure reliable testing. Reliable testing depends on several factors; Practice D 3740 provides a means of evaluating some of those factors.

6. Apparatus

6.1 *Evaporating Dish*, porcelain, about 140 mm (5½ in.) in diameter.

6.2 *Spatula*, or pill knife having a blade about 76 mm (3 in.) in length and about 19.0 mm (¾ in.) in width.

6.3 *Shrinkage Dish*—A circular porcelain or monel metal milk dish having a flat bottom and being about 44 mm (1¾ in.) in diameter and about 12 mm (½ in.) in height.

6.4 *Straightedge*, steel, about 150 mm (6 in.) in length.

6.5 *Glass Cup*, about 57 mm (2¼ in.) in diameter and about 31 mm (1¼ in.) in height, the top rim of which is ground smooth and is in a plane essentially parallel with the bottom of the cup.

6.6 *Glass Plate*, with three metal prongs for immersing the soil pat in mercury, as shown in Fig. 1.

6.7 *Glass Plate*, a plane glass plate large enough to cover the glass cup.

6.8 *Graduate*, glass, having a capacity of 25 mL and graduated to 0.2 mL.

6.9 *Balance*, sensitive to 0.1 g and conforming to the requirements of Class GP2 balances in Specification D 4753.

6.10 *Mercury*, sufficient to fill the glass cup to overflowing.

6.11 *Shallow Pan*, about 20 by 20 by 5-cm (8 by 8 by 2-in.) deep nonmetallic (preferably glass) pan used to contain accidental mercury spills.

7. Hazards

7.1 **Warning**—Mercury is a hazardous substance that can cause illness and death. Inhalation of mercury vapor is a serious health hazard. Mercury can also be absorbed through the skin. The effects of mercury are cumulative.

7.2 **Precaution**—In addition to other precautions, store mercury in sealed shatter-proof containers to control evaporation, work in a well-ventilated area (preferably under a fume hood), and avoid contact with skin. Rubber gloves should be worn at all times.

7.3 Minimize uncontrolled spills by performing those parts of the procedure (9.3 and 9.6) in a large shallow pan which can act as a catchment.

7.4 Clean up spills immediately using a recommended procedure explicitly for mercury.


7.5 Dispose of contaminated waste materials including the dry soil pat in a safe and environmentally acceptable manner.

8. Sampling

8.1 Select about 30 g of soil from the thoroughly mixed portion of the material passing the No. 40 (425-µm) sieve which has been obtained in accordance with Practice D 421.

9. Procedure

9.1 Place the soil in the evaporating dish and thoroughly mix with distilled water. The amount of water added should produce a soil of the consistency somewhat above the liquid limit (Test Method D 4318) based on visual inspection. In physical terms, this is a consistency that is not a slurry but one that will flow sufficiently to expel air bubbles when using gentle tapping action. It is desirable to use the minimum

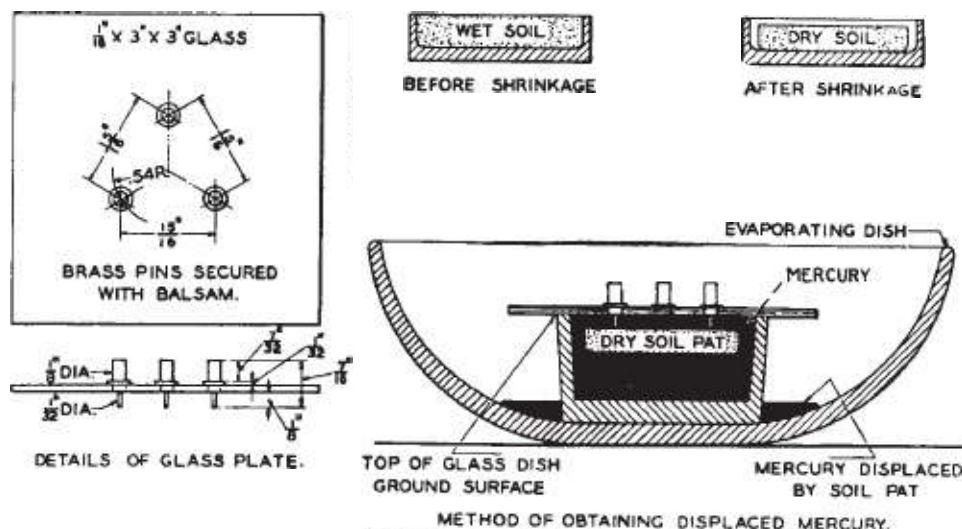

		Metric Equivalents					
in.	1/32	1/16	1/8	7/32	7/16	15/16	3
mm	0.8	1.6	3.2	5.6	11.1	23.8	76.2

FIG. 1 Apparatus for Determining the Volumetric Change of Subgrade Soils



TABLE 1 Table of Precision Estimates

Material and Type Index	Average Value	Standard Deviation ^A	Acceptable Range of Two Results ^A
Single-Operator:			
Shrinkage limit	16	0.6	1.8
Shrinkage ratio	1.90	0.04	0.13
Multilaboratory:			
Shrinkage limit	16	1.7	4.8
Shrinkage ratio	1.90	0.07	0.19

^AThese numbers represent, respectively, the (1s) and (d2s) limits as described in Practice C 670.

conditions listed in the first column. These values only apply to soils which are similar to Proficiency Samples 103 and 104.

NOTE 5—The figures given in Column 3 are the standard deviations that have been found to be appropriate for the test results described in Column 1. The figures given in Column 4 are the limits that should not be exceeded by the difference between two properly conducted tests.

NOTE 6—Criteria for assigning standard deviation values for highly plastic or noncohesive soils are not available at the present time.

13. Keywords

13.1 Atterberg limits; cohesive soils; dry strength; linear shrinkage; mercury; shrinkage ratio; volumetric shrinkage

SUMMARY OF CHANGES

Committee D-18 has identified the location of selected changes to this standard since the last issue (D 427 – 93 (1998)) that may impact the use of this test method.

1. Added Note 2 referencing Practice D 3740. Subsequently renumbered notes affected by adding Note 2.
2. In 9.3, changed ... mg/m³ to Mg/m³.
3. Moved location of Table 1 to be follow 12.2.1.

The American Society for Testing and Materials takes no position respecting the validity of any patent rights asserted in connection with any item mentioned in this standard. Users of this standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, are entirely their own responsibility.

This standard is subject to revision at any time by the responsible technical committee and must be reviewed every five years and if not revised, either reapproved or withdrawn. Your comments are invited either for revision of this standard or for additional standards and should be addressed to ASTM Headquarters. Your comments will receive careful consideration at a meeting of the responsible technical committee, which you may attend. If you feel that your comments have not received a fair hearing you should make your views known to the ASTM Committee on Standards, 100 Barr Harbor Drive, West Conshohocken, PA 19428.